

# Simcenter 3D Electronic Systems Cooling

### Thermo-fluid analysis for electronics

#### Benefits

- Simulate 3D air flow and thermal behavior in electronic systems
- Perform digital thermal simulation early in the design process, reducing the need for building and testing physical prototypes
- Integrate analysis with mechanical engineering and design for guidance, not just verification
- Minimize tedious rework and modeling errors with direct interfaces to ECAD systems
- Display simulation results to gain physical insight and optimize design
- Condensation, humidity and dust particle transport in electronics systems

#### Summary


Simcenter<sup>™</sup> 3D Electronic Systems Cooling software is an industry-specific vertical application that leverages the Simcenter 3D Flow and Simcenter 3D Thermal solvers as well as the NX<sup>™</sup> PCB Exchange capabilities in an integrated multiphysics environment to simulate 3D air flow and thermo-fluid behavior in densely packed, heat-sensitive electronic systems. Simcenter 3D Electronic Systems Cooling helps resolve thermal engineering challenges early in the design process and is a valuable aid in understanding the physics of fluid flow and heat transfer for electronic enclosures.

CompactFlash

#### **Product description**

Simcenter 3D Electronic Systems Cooling continues Siemens' long heritage in thermal simulation and leverages the same technology that underpinned the I-deas™ TMG solution. Simcenter 3D Electronic Systems Cooling is ideal for modeling and analyzing electronics cooling applications with complex 3D design geometry. As an integral part of the complete NX digital product development suite, the Simcenter 3D Electronic Systems Cooling solvers enable you to effectively use simulation to provide design guidance early in the design cycle, not just final design verification.

Modeling of complex 3D assemblies is made easy with the integrated Simcenter 3D Engineering Desktop capabilities (a prerequisite for Simcenter 3D Electronic Systems Cooling). No additional input files or geometry conversions are needed to build your coupled thermo-fluid models. Simcenter 3D provides a distributed model approach to assembly analysis whereby the assembly FEM model does not contain the component FEM models, but instead holds pointers to these models. Assembly FEM enables a more efficient process for building large models comprised of multiple components. Synchronous technology enables users to modify geometry by easily moving or deleting individual faces or features such as bosses or ribs.

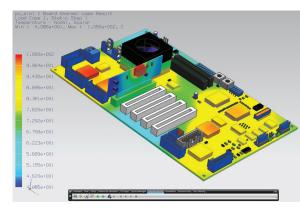

# Simcenter 3D Electronic Systems Cooling

Synchronous technology empowers analysts to make simple changes to geometry to support what-if analyses, thereby accelerating design-analysis iterations. Furthermore, this technology works with native and imported geometry, both with or without history.

The Simcenter 3D Electronic Systems Cooling package includes NX PCB Exchange, a bi-directional interface to EDA design systems for the direct use of PCB and FPC data. With NX PCB Exchange, fully three-dimensional board designs can be obtained from the leading PCB and FPC layout software packages, including:

- Zuken
- Mentor Graphics
- Cadence
- Altium

#### Industry applications

The thermal performance simulation capabilities of Simcenter 3D Electronic Systems Cooling can be leveraged to meet the electronics product design requirements for virtually all industries. Typical electronic systems cooling applications include:

- Determining electronic systems cooling strategies
- Enclosures, subsystems, power supplies thermal management
- PC boards, FPCs, multi-chip modules detailed thermal design
- Critical components placement
- · Heat sink modeling
- Spacing requirements between critical parts
- Predicting fan operating conditions
- Volume and mass flow estimations
- Computing pressure inlet/outlet gradients and head losses
- Identifying recirculation areas and hot spot issues

# Specific capabilities for electronic systems simulation

- Fan catalog (database of fan curves) with more than 2,000 fans from leading manufacturers
- Thermal control models:
  - Thermostats, active heater controllers, fan controllers
  - PID Peltier cooler modeling
- Electrical component modeling (two-resistor models with automatic temperature reporting)
- Joule heating
- Modeling of layered printed circuit boards with spatially varying thermal properties

#### Board thermal analysis

NX PCB Exchange can be used to automatically generate board thermal models, ready to be solved using Simcenter 3D Electronic Systems Cooling. Users can control the default component parameters, board mesh size and color, and environmental conditions. By referencing a user database of component thermal properties, NX PCB Exchange creates a suitable model for each electrical component. PCB Exchange uses copper trace data imported from ECAD to compute and apply detailed conductive properties to the board thermal models.

#### Core simulation capabilities

- 3D CFD Navier-Stokes and solid heat conduction
- Steady-state and transient analysis
- Turbulent (k-E, mixing length) and laminar flows
- Internal and external flows
- Buoyancy and altitude effects
- Multiple fluid enclosures with distinct fluids
- Radiation enclosures using hemicubebased view factor calculations (using graphics card hardware)


#### < 🔪 Fan Catalog 🕑 — 🗙 ≽

ltem	Description		
B- Company	MODEL# DAF77B3		
COMAIR ROTRON	PART# 031620 5.25 DIPLOMAT AC		
- EBM PAPST		AC BACKWARDS CURVED IMPELLER WHEEL	
AC Axial Fans AC AXia Fans AC AXiA AXIA AXIA AXIA AC AXIA AC AXIA AC AXIA AC AXIA AC AXI	no protonico con		
AC Backward Curved Impeller			
. AC Flatpak			
AC Tubeaxial Fans AC			
DC Axial Fans			
DC Backward Curved Impeller			
• DC Flatpak			
• DC Tubeaxial Fans			
• Dual Inlet Centrifugal Blower			
Single Inlet Centrifugal Blower			
Specialty Air Moving Products			
- MECHATRONICS			
DC Tubeaxial Fans			
- NMB TECHNOLOGIES	-		
AC Tubeaxial Fans	Property	Value	
DC Blower Fan	FAN CURVE	(0,0.249082),(3.7756e+007,0.149449),(8.0	
DC Tubeaxial Fans	SIZE	5.2362" dia. X 3.5827" (133mm dia. X 91mm)	
B- PANASONIC	RATED VOLTAGE	230 VAC 60 Hz	
DC Blower Fan	RUNNING CURRENT	0.14 Amp.	
- DC Tubeaxial Fans	POWER	30 Watts	
B- SANYO DENKI	FLOW_RATE	4.81389 m3/min	
- Alarm Dyna Ace - AC	PRESSURE_RISE	25.4 mmH2O	
Alarm High Ace - AC	RPM	3350	
- Alarm Mini Ace 25 - AC	OPERATING TEMP. RANGE		
Alarm San Ace - AC	WEIGHT	23.9863oz (0.68kg)	
- Dyna Ace - AC	NOISE	75.2 dBA	
- High Ace - AC			
E Long Life Fan			
Mini Ace - AC			
Mini Ace 25 - AC			
Petit Ace - AC			
- Pico Ace - AC			
⊕- San Ace			
⊕- San Ace - AC			
Splash Proof Fan			
B- SHICOH			
😟 - DC Tubeaxial Fans			
()	>		
		OK	

- Parallel processing
- Up to eight solver processes per analysis on a single machine
- Unlimited processes across multiple machines
- Geometry optimization supporting flexible design objectives and variables

#### Meshing

- Supports all combinations of tetrahedral, brick, wedge and pyramid element types
- Complete set of automatic and/or manual meshing options for the selected fluid domains
- Companion Advanced Fluid modeling product for rapid domain generation in electronics enclosures through surface wrapping technologies
- Automatic connection between disjoint fluid meshes
- Disjoint thermal/fluid meshes support in assembly modeling

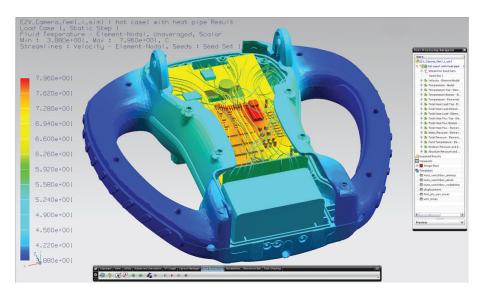

#### Boundary and interface conditions and imposed loads


- Vent and fan definitions: fan curves can be defined
- Head loss inlets and openings (fixed or velocity-dependent)
- Fluid swirl at inlet and internal fans
- Fluid recirculation loop models
- Constant, time and spatially varying heat loads and temperature constraints
- Losses in fluid flow due to screens, filters and other fluid obstructions (including orthotropic porous blockages, packed beds and other porous media)
- Thermal couplings (welded, bolted, bonded joints, etc.) for assembly modeling with potential for spatially varying heat transfer coefficients
- Forced and natural convection enhanced wall functions

#### Solver control


- Solution intermediate results recovery allowing solver restart
- 10 choices of units at run time
- Coupled fluid-thermal solver control

#### Postprocessing

- Thermal, flow data tracking and plotting of monitor points, at run time
- Streamlines, ribbons and bubbles postprocessing display
- Mapping of pressures, shear forces and temperatures to structural models with dissimilar mesh

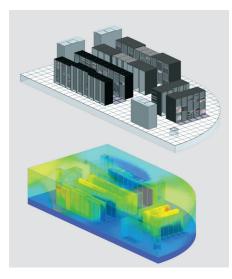

Thermal-flow analysis within a data center.



#### Add-on solutions:

Simcenter 3D Electronic Systems Cooling can be combined with the Simcenter 3D Advanced Thermal and Simcenter 3D Advanced Flow product to add:

- Advanced capabilities of radiation, ideal for thermal problems in lighting applications
- Advanced flow features like scalars, humidity and heavy particle tracking, single and multiple rotating frames of reference, additional turbulence models, 1D duct networks
- Environmental solar heating models (including atmospheric and positional effects)
- Open architecture with access to thermal system equations and importing of external models
- Particle and humidity transport with condensation analysis

#### Supported hardware/OS

Simcenter 3D Electronic Systems Cooling is an add-on module in the Simcenter 3D suite of applications. All standard NX hardware/OS platforms are supported (including Windows, Linux and selected 64-bit platforms). Contact Siemens for any other specific hardware/OS support requests.

## Siemens PLM Software www.siemens.com/plm

Americas+1 314 264 8499Europe+44 (0) 1276 413200AsiaPacific+852 2230 3308

© 2017 Siemens Product Lifecycle Management Software Inc. Siemens and the Siemens logo are registered trademarks of Siemens AG. Simcenter is a trademark or registered trademark of Siemens Industry Software NV or any of its affiliates. All other trademarks, registered trademarks or service marks belong to their respective holders. 10652-A8 2/17 W